

The Marconi Parapet – monoblade upright


The Marconi solution is a kit composed of: 1) L-shaped EN AW 6060 T6 extruded aluminium alloy mounting brackets and EN AW 6082 T6 flat extruded aluminium alloy uprights with a partly tapered upper section which has been cut to allow easy joining to the handrail; 2) a round C7055 Aluscalae handrail which is 45mm in diameter and has a horizontal fastening plate; 3) perforated aluminium panels with ribbing along the bottom and an L-shaped finish, which are to be attached to the stanchions via screws and the upper part of which is to be inserted into the special hollow created in the extruded handrail.



load capacity	interaxial distance
1KN/m	180 cm
1,5KN/m	145 cm
2 KN/m	125 cm

Kit contents

- 100mm x 12mm tapered and wrought upright
- 100 x 80 x 10 mm moulded mounting brackets
- Aluscalae C7055 handrail (diameter: 45mm)
- Perforated, moulded aluminium panel
- Aluminium terminals and corner joints
- Stainless steel, class A2 nuts and bolts for assembly
- Stainless steel M12x120 mounting plugs

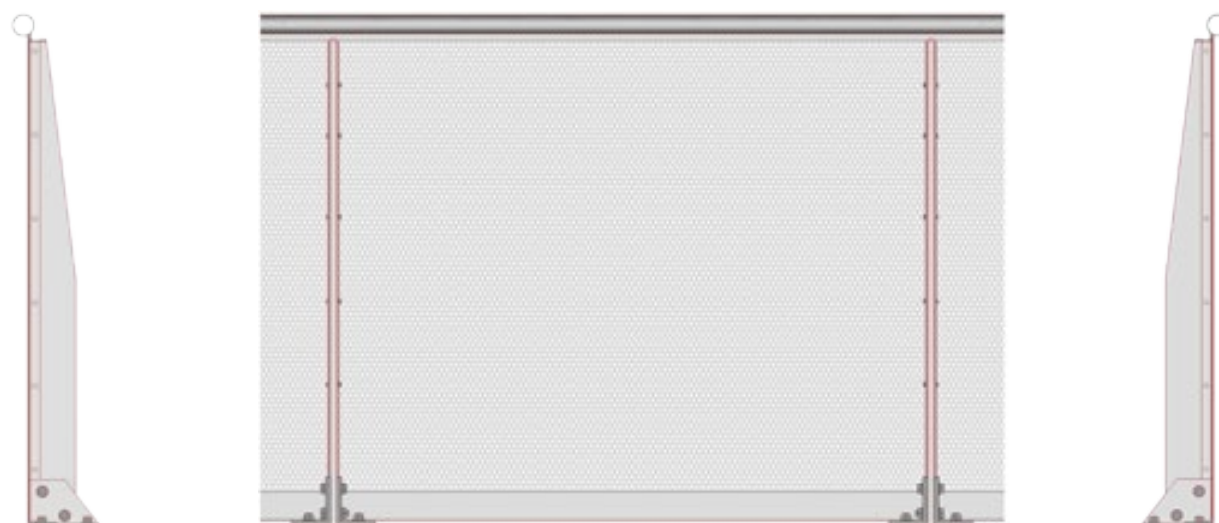

AW6060 T5 handrail (diameter: 45mm)

M8x20 button screw

M6x30 button screw with M6 nut

100x12 L990 AW6082 T6 plate

20/10mm-thick micro-perforated sheet

20x3 L890 AW6060 T5 plate

110x10 L140 corner bracket

M12x50 cl.A2 (x2)

60x3 "L" section

M12x 100/120mm mounting plugs (x2)

